REV	DESCRIPTION	DESIGN	DATE
A0	NEW RELEASE	Steven	2019/07/16

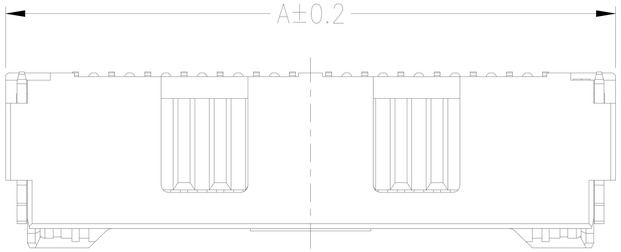

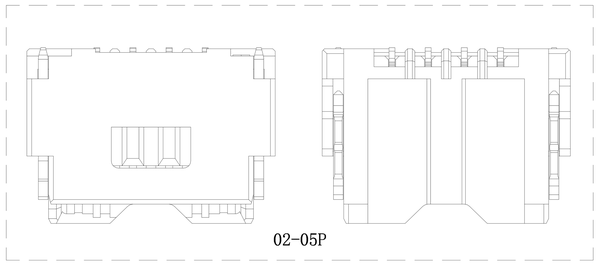

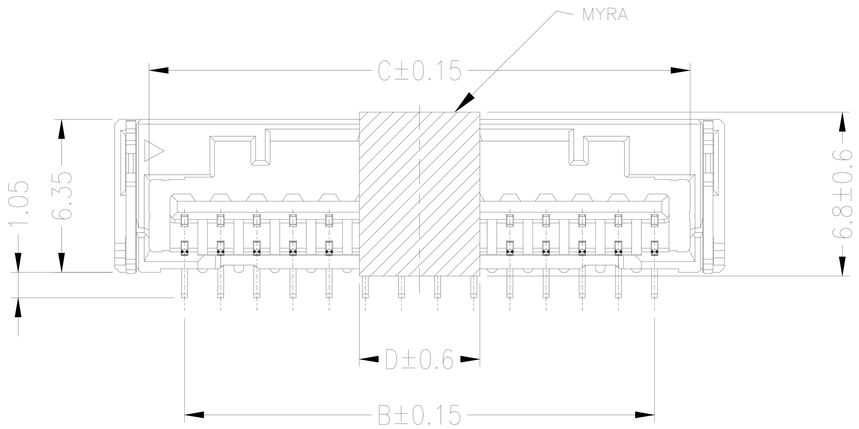



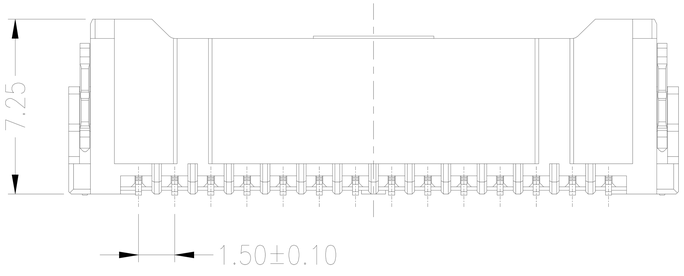

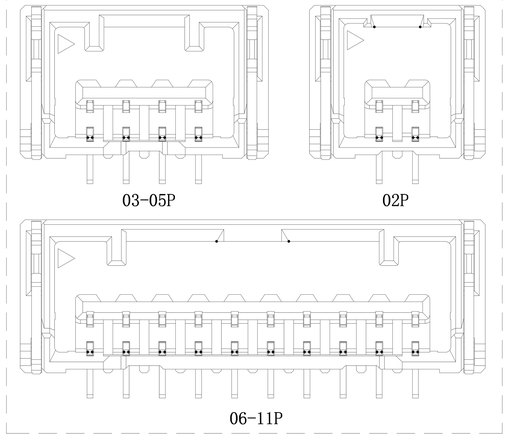

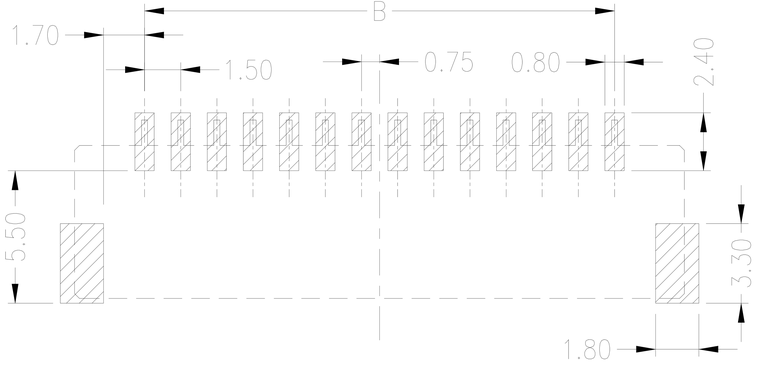



Specifications:

Contact resistance:≤20mΩ
Insulation resistance:≥500MΩ
Rated voltage:100V AC DC
Rated current:2.0A AC DC(AWG#24)
Withstand Voltage: 500V AC/minute
Temperature Range:-40°C～ +105°C
Housing:LCP UL94V-0,Natural(Beige)
Contacts:Phosphor Bronze/Sn-plated
Solder Tabs:Brass/Sn-plated

孔位 \ 尺寸	A	B	C	D	孔位 \ 尺寸	A	B	C	D
2P	7.30	1.50	4.45	6.10	9P	17.80	12.00	14.95	5.00
3P	8.80	3.00	5.95	7.60	10P	19.30	13.50	16.45	5.00
4P	10.3	4.50	7.45	9.10	11P	20.80	15.00	17.95	5.00
5P	11.8	6.00	8.95	10.6	12P	22.30	16.50	19.45	5.00
6P	13.3	7.50	10.45	12.1	13P	23.80	18.00	20.95	5.00
7P	14.80	9.00	11.95	13.60	14P	25.30	19.50	22.45	5.00
8P	16.30	10.50	13.45	5.00	15P	26.80	21.00	23.95	5.00

紅焱電子有限公司

GENERAL TOLERANCE	
X. ±0.50	X. ±5°
X.X ±0.30	X.X ±2°
X.XX ±0.20	X.XX ±1°
	UNITS: mm

USE: CUSTOMER
APPD: Wangliang
CHKD: Zenglingqing
DR: Steven

TITLE: 1.5 Pitch Wafer 180° SMT
PART NO.: A1506AWV-NP
DWG NO.:
SCALE 1 : 1
SHEET 1 / 1

REV	DESCRIPTION	DESIGN	DATE
A0	NEW RELEASE	Steven	2019/00/00

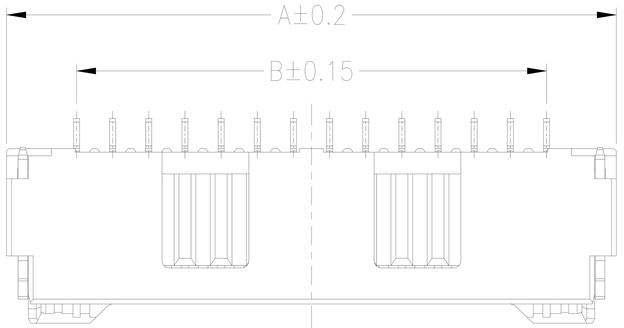

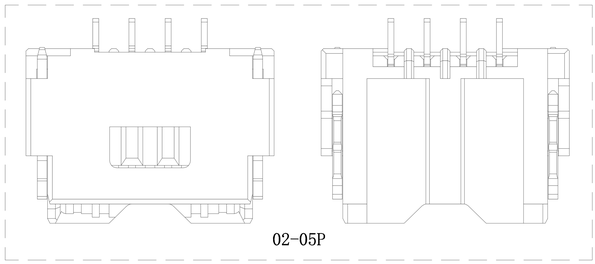

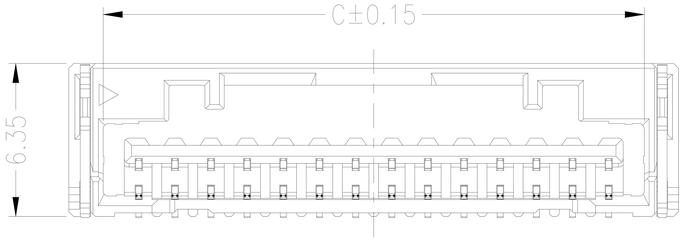

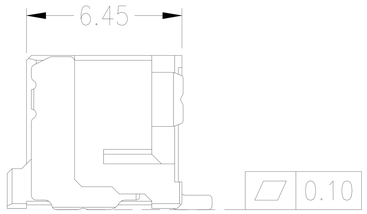

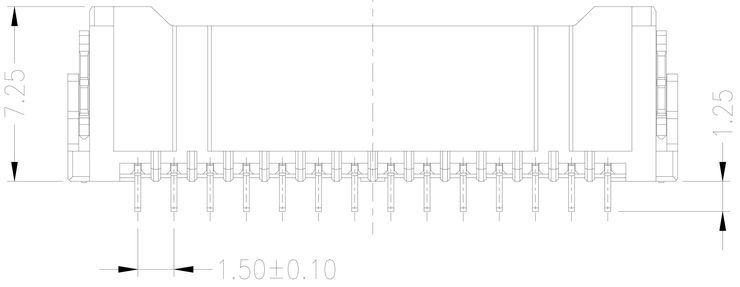

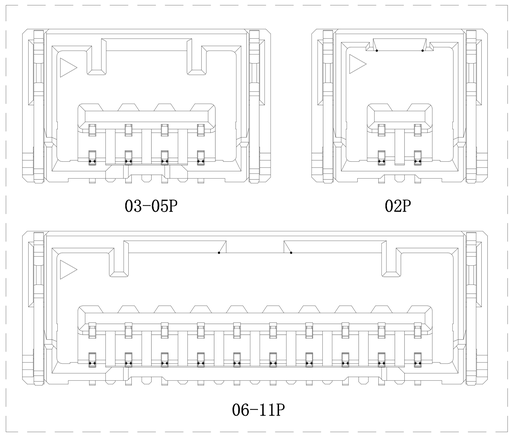

Specifications:

Contact resistance:≤20mΩ
Insulation resistance:⩾500MΩ
Rated voltage:100V AC DC
Rated current:2.0A AC DC(AWG#24)
Withstand Voltage: 500V AC/minute
Temperature Range:-40°C～ +105°C
Housing:LCP UL94V-0,Natural(Beige)
Contacts:Phosphor Bronze/Sn-plated
Solder Tabs:Brass/Sn-plated

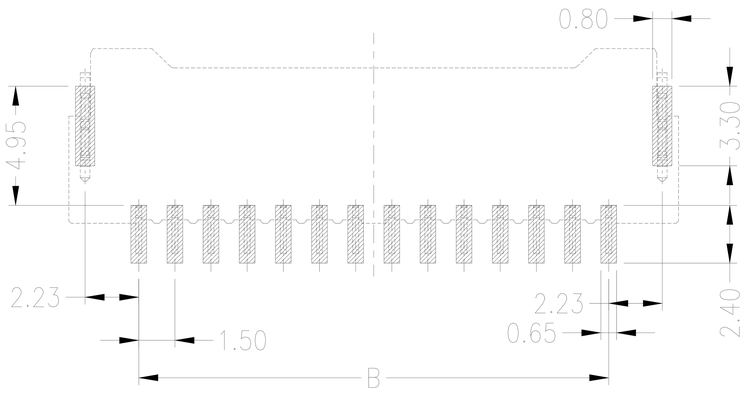

PCB LAYOUT

孔位 \ 尺寸	A	B	C	孔位 \ 尺寸	A	B	C
2P	7.30	1.50	4.45	9P	17.80	12.00	14.95
3P	8.80	3.00	5.95	10P	19.30	13.50	16.45
4P	10.3	4.50	7.45	11P	20.80	15.00	17.95
5P	11.8	6.00	8.95	12P	22.30	16.50	19.45
6P	13.3	7.50	10.45	13P	23.80	18.00	20.95
7P	14.80	9.00	11.95	14P	25.30	19.50	22.45
8P	16.30	10.50	13.45	15P	26.80	21.00	23.95

紅焱電子有限公司

GENERAL TOLERANCE			
X.	±0.50	X.	±5°
X.X	±0.30	X.X	±2°
X.XX	±0.20	X.XX	±1°
UNITS: mm			

USE: CUSTOMER
APPD: Wangliang
CHKD: Zenglingqing
DR: Steven

TITLE: 1.5 Pitch Wafer 90° SMT
PART NO.: A1506AWR-NP
DWG NO.:
SCALE 1 : 1
SHEET 1 / 1